




Made in the USA

## Symmetry Vertical Platform Lift

# Model VPL-SL

Vertical Platform Lift - Shaftway Lift  
Residential and Commercial Application

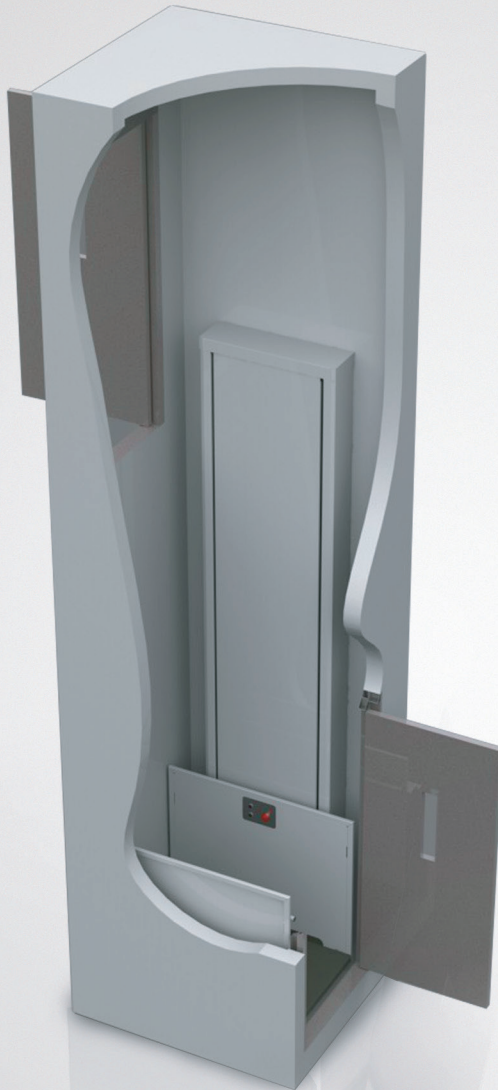

 **symmetry**  
ELEVATING SOLUTIONS  
National Reach. Local Service.®

### Now Available with:

- Low Profile Carriage
- High Speed Screw Drive at 20 fpm
- Full Speed Battery Back-up
- Reduced Pit Application



[www.symmetryelevator.com](http://www.symmetryelevator.com)



# Convenient access to all levels

Whether it's commercial or residential use, outdoor or indoors, Symmetry Vertical Platform Lifts eliminate the barrier that stairs can cause for people with limited mobility. A cost effective solution, platform lifts create convenient access without compromising architectural character.

The Symmetry VPL Model SL is designed in compliance with ICC/ A117.1, NEC, and ASME A18.1. The entire Symmetry VPL Product Line is designed around ADA 4.11 compliance and public and private accessibility. Symmetry VPLs are suitable for indoor and outdoor use.

## Standard Features

- 750 – 1,000 pound capacity
- Speed: 10 FPM, 1 HP, 115V (Acme Screw Drive);  
20 FPM, 1 HP, 115V (Accelerated Acme Screw Drive);  
17–20 FPM, 2 HP, 115V (Hydraulic)
- Lifting height: up to 60" for commercial applications and  
168" for residential applications
- Steel constructed with electrostatic, powder-coated finish
- **A.W.A.R.E. system [Active Wiring, Accessories, Relay, and Electronics Diagnosis]\***
- Constant pressure up/down control switch installed on the platform
- Constant pressure, elevator-style, hall call control station provided at each landing

## Optional Features

- **Low profile Carriage: 1 ½" pit depth\***
- **Remote mounted controller\***
- 230V motor
- ADA phone for both indoor and outdoor models
- Emergency lights
- Key switch to lock platform and landing controls
- Stationary ramp
- Battery Back-up at Full Speed
- **Power gate operators\***

## Safety Features

- Nonskid platform surface (black)
- Obstruction safety panel under platform (when not installed within a runway enclosure)
- Alarm and emergency stop switch
- Grab rail
- Landing interlocks keep doors closed/locked when the lift platform is at another landing
- Upper final limit switch

## Platform Sizes (Custom sizes, designs, and colors available)

- 36" W x 48" D      • 36" W x 54" D
- 36" W x 60" D      • 42" W x 60" D
- Custom: \_\_\_\_\_ inches width x \_\_\_\_\_ inches depth

## Enter/Exit Configurations

- Straight through
- 90° adjacent
- Enter/Exit same side

## Gate/Door Options

- 42" lower platform gate\*
- 42" upper landing gate\*
- 80" landing gate\*
- Non-Fire-rated red oak door\*\*
- Fire-rated steel door

## Warranty

\* Symmetry Vertical Platform Lifts come with an industry leading four (4) year warranty on parts and basic unit, including all electrical and drive components

\* Available with optional acrylic insert

\* Indicates exclusive to Symmetry Elevating Solutions

\*\* Also available in other wood choices, by request

Choose from a stationary or more compact folding ramp, depending on your space requirements

Division 14 Specs: [www.div14specs.com](http://www.div14specs.com) – One stop website to view brochures, download specifications, CAD, PDF, and Revit files.



SpeCreator: [www.speccreator.us](http://www.speccreator.us) – Custom designed software and specification generator created to easily build division 14 product specifications. The SpeCreator will create your project specific set of CSI 3-part specifications.

This brochure is intended for informational purposes only. Please contact a local Symmetry dealer for a job specific drawing. The information contained on this chart is intended for layout design only and should not be used for construction.

Straight through configuration			
Platform Width	Platform Length	Finished Hoistway/Pit Width	Finished Hoistway/Pit Length
36"	48"	51 1/2"	49 1/2"
36"	54"	51 1/2"	55 1/2"
36"	60"	51 1/2"	61 1/2"
42"	60"	57 1/2"	61 1/2"
90° Exit configuration			
42"	60"	55 1/4"	63 1/2"
Enter/Exit same side configuration			
36"	54"	51 1/2"	57 1/2"
36"	60"	51 1/2"	63 1/2"
42"	60"	57 1/2"	63 1/2"

\*This brochure is intended for informational purposes only

## Footprint Layout

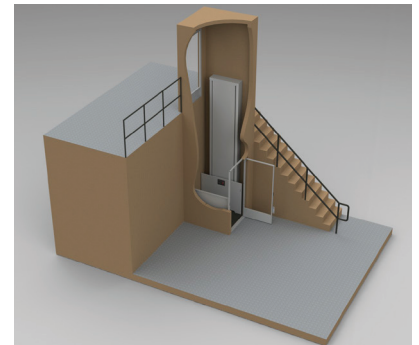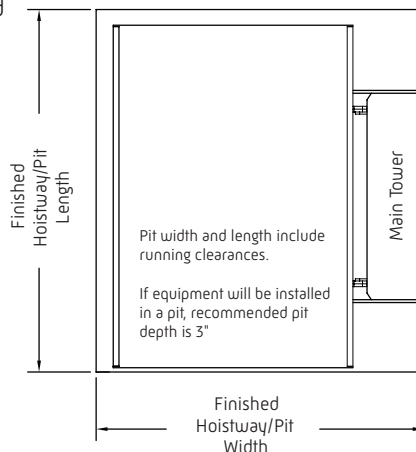

Straight Through Shaftway Application Shown

## Enclosure Color Options



Ivory  
standard



Black  
optional



White  
optional



Grey  
optional

Full selection of RAL colors available



National Reach. Local Service.®

877.375.1428 | [symmetryelevator.com](http://symmetryelevator.com)

304.07/16